


Hydraulic Torque Pumps

FE-Series
800 Bar

- Working pressure 800 bar maximum
- 40-800 bar stepless pressure adjustment available
- Multipoint connection for more torque wrenches
- Double and three stage high performance pump units
- Calibrated, Clas 1, 1000 bar, Ø 100mm precision gauge
- Designed for high performance and continuous operations
- Oil filter, oil cooler and flat stable oil tank by FE series
- Oil level indicator - thermometer and protecting frame
- German made with CE marking, after sales service in Turkey

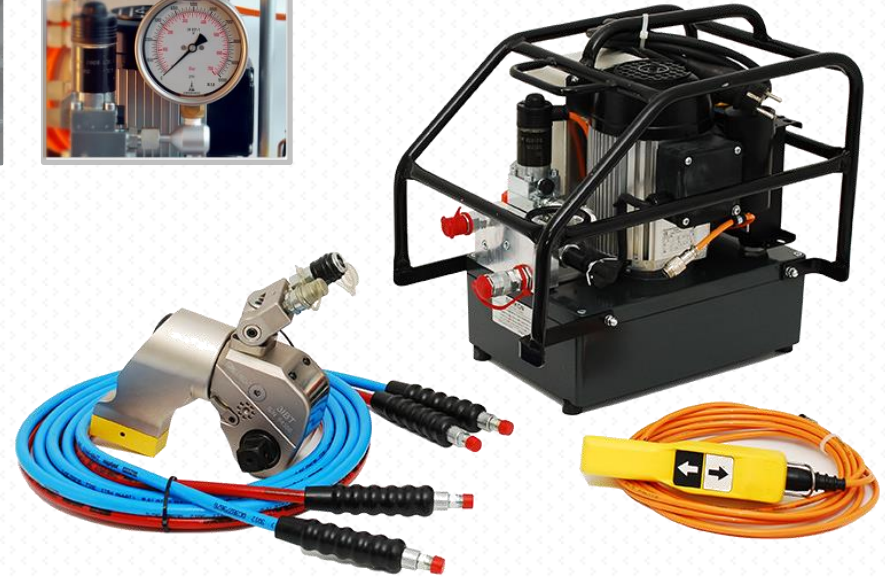

FE-055-3

Model No	FE-055-3	FE-110-3
Operating Voltage	110 /115/ 230 Voltage	115 / 230 / 400 Voltage
Electric Motor Power	0,55 kW	0,11 kW
Flow Rate	6,5 –1,8 – 0,7 L/min.	8,5 –3,4– 1,3 L/min.
Oil Capacity	6 Litre	6 Litre
Carrying Handle	Available	Available
Cooling System	Available	Available
Weight	30 Kg	36 Kg
Sizes (U-G-Y)	40 x 28 x 40 cm	46 x 30 x 44 cm
Recommended Oils	Mobil DTE24 - Tellius 32 - Energol HLP-HM32	

Surkon Makina Sanayi Ticaret Limited Şirketi

İvedik Org. San. Bölgesi - Özpetek Sanayi Sitesi 1390 Sokak.- No: 12 – TR-06378 – Yenimahalle / ANKARA Tel: (0 312) 386 14 64 / Faks: (0 312) 386 14 88
e-mail : eposta@surkon.com www.surkonmakina.com

SURKON[®]
INTERNATIONAL